

elcometer®
inspection equipment



Elcometer 1720
Washability & Abrasion Testers

Elcometer 1720

Washability & Abrasion Testers

STANDARDS:
AS/NZS 1580.459.1, ASTM D 2486,
ASTM D 3450, ASTM D 4213,
ASTM D 4488, ASTM D 4828,
ASTM F 1319, DIN 53778-2:1983,
ECCA T11, EN 12956, EN 13523-11,
EN 233/C3.2-A, EN 233/C3.2-B,
EN 233/C3.2-C, EN 60730-1-A,
GME 60269, ISO 105-X12,
ISO 11998, JIS K 5600-5-11,
PSA D45 1010, ASTM D1792 - 06
ASTM D2198 -02, ASTM D3206 - 08,
ASTM D6279 - 03(2007), MIL-C-3004,
MIL-C-46057, MIL-E-11237,
MIL-STD-1334B, MIL-P-15422C,
FTMS 141, Method 6141,
FTMS 141, Method 6142,
FTMS Method 536/6701,
Federal Specification P-D-220D,
P-R-1760, P-W-155C, TT-P-26C(1),
TT-P-29K, TT-P-30E(1), TT-P-47G,
TT-E-505B, TT-E-506K(1),
TT-E-509C, TT-C-535B(2),
TT-C-555B(1)

These robust, reliable and extremely versatile machines have been designed for testing the washability, brushability and resistance of a wide range of materials including paint, lacquers, inks, coatings, leather, wood, plastics, printed material, fabrics etc.

Test up to 4 samples simultaneously

User adjustable stroke length from 10 to 300mm (0.4 to 11.8")

Rapid tool change

All stations can be tested wet or dry

The durable and robust design is stable under test allowing repeatable results, even at the fastest stroke speeds

Multi-lingual digital display

Available with or without an integrated liquid dosing pump

Speed Cycles can be adjusted from 10 to 65 cycles per minute or set to the ISO Standard of 37 cycles/min



Wide range of tools available, for testing flat and curved samples (see page 5)



Washability & Abrasion Testers

Elcometer 1720



Meeting Standards

- With the wide range of tools available many Standards can be tested in one unit
- All units can be used in accordance with ASTM, DIN, EN and ISO Standards
- Easily adjustable to customers unique applications using the special tools
- Washability and abrasion testing on flat and curved samples up to 13mm (0.51") thick



Interchangeable Tools

- All tools are interchangeable with the rapid tool change system, making the unit ideal for use in accordance with a wide range of Standards

For the complete range of tools, see page 19-5



User Adjustable

- Stroke length can be quickly and easily changed by the user to meet their specific requirements between 10 - 300mm (0.4 - 11.8")
- Speed of carriage can be adjusted between 10 and 65 cycles per minute
- Cycle counter can be pre-set for a defined number of cycles from 1 - 32,760



Wet and Dry

- All stations can be tested wet or dry
- Versions are available with or without an internal liquid pump
- Samples can be tested under wet or dry conditions



Economic

- With the ability to test up to 4 different characteristics simultaneously, significant time can be saved
- With its rapid tool change system setting up tests is fast and easy
- Easy sample placement allows quick change between tests

Washability & Abrasion

Elcometer 1720

Washability & Abrasion Testers



Available in 2 versions:
2 station - undertakes two tests at a time.
4 station - tests up to four samples with 4 different tests.



Stroke speed can be varied between 10 and 65 cycles/min or set to 37 cycles/min to meet ISO Standards.



Stroke length can be adjusted by the user to meet specific requirements, from 10 to 300mm (0.4 to 11.8").



Available with or without liquid dosers, allowing test liquids to be regulated automatically or independently.



Digital display allows easy, accurate speed variation and simple reporting.



The rapid tool change system allows the user to test the samples in accordance with a wide range of National and International Standards on both flat and curved samples simultaneously.

Technical Specification

C

Part Number	Description	Certificate
K1720M202	Elcometer 1720 Abrasion Tester, 2 Station (110 - 240V)	○
K1720M204	Elcometer 1720 Abrasion Tester, 4 Station (110 - 240V)	○
K1720M302	Elcometer 1720 Abrasion & Washability Tester, 2 Station (110 - 240V)	○
K1720M304	Elcometer 1720 Abrasion & Washability Tester, 4 Station (110 - 240V)	○
Dimensions	550 x 460 x 320mm (21.7 x 18.1 x 12.6")	
Weight	2 Station: 31.5kg (70lb), 4 Station: 33kg (73lb)	
Packing List	Elcometer 1720, 250µm (10mil) metal strip for ASTM D2486 Standard, sample drip tray, 1 x glass sheet (2 station), 2 x glass sheet (4 station), 1 x specimen holding frame (2 station), 2 x specimen holding frame (4 station), set of 3 tools for instrument set up, 3 x mains leads (UK, EUR and US) and operating instructions. Elcometer 1720 part numbers K1720M302 and K1720M304 also include a liquid dosing bottle, liquid delivery pipe and 2 liquid drain pipes. Tools are supplied separately, please order from the list on page 6.	



Scrub Test Panels are also available - see page 7 for more information

○ Optional Calibration Certificate available.

Washability & Abrasion Testers

Elcometer 1720

The Elcometer 1720 can undertake tests according to a wide range of different Standards and Test Methods by simply changing the abrasive tools. For more information on Standards, please see section 23. Please select the required tools from the list on the following two pages. Samples can be tested in a combination of both wet and dry methods.



Tool 1: Wild Boar Brush

Wild boar hair brush and stainless steel brush holder.
Total weight: 250g (8.82oz)

Part Number: **KT001720P003**

STANDARDS:

DIN 53778-2:1983



Tool 2: Nylon Brush

Nylon bristle brush, stainless steel brush holder and 177g (6.2oz) mass.
Total weight: 454g (16.01oz)

Part Number: **KT001720P030**

STANDARDS:

ASTM D2486



Tool 3: Sponge

Sponge and stainless steel brush holder, 337g (11.9oz).
Total weight: 508g (17.92oz)

Part Number: **KT001720P005**

STANDARDS:

ASTM D4213:92, ASTM D4828



Tool 4: Sponge

Sponge and stainless steel brush holder, 337g (11.9oz) and 250g (8.8oz) mass to bring gross weight to 750g.
Total weight: 750g (26.45oz)

Part Number: **KT001720P073**

STANDARDS:

ASTM D3450



Tool 5: Sponge / Abrasive

Sponge & stainless steel holder abrasive pads - top and bottom & 76g (2.7oz) mass.
Total Weight: 232g (8.12oz)

Part Number: **KT001720P029**

STANDARDS:

ASTM D4213



Tool 6: Abrasive

Aluminium holder, abrasive pads (x5).
Total weight: 135g (4.76oz)

Part Number: **KT001720P036**

STANDARDS:

ISO 11998



Tool 7: Universal Material Clamp

Stainless steel holder allowing users to fix their own test sample or abrasive material. Ideal for abrasion and wear of labels, textiles, ink etc.

Part Number: **KT001720P207**



Tool 8: Linear Abrader "Crockmeter"

This tool is ideal for testing abrasion on both curved and flat surfaces and for testing colour fastness of fabrics. Supplied with a removable stainless steel rod, test felt, textile fixing ring and a set of additional masses - 2x100g (3.5oz), 1x200g (7oz), 1x500g (17.6oz). Total weight (excluding masses): 200g (7oz)

Part Number: **KT001720P074**

STANDARDS:

ASTM F1319, ISO 105-X12, PSA D45 1010

Elcometer 1720

Washability & Abrasion Testers



Tool 9: Linear Abrader

For testing the resistance to abrasion of automotive components, includes a felt disc of 10mm (0.4") diameter and 10mm (0.4") thick working under a mass of 400g (14.1oz).

Total weight: 400g (14.11oz)

Part Number: **KT001720P075**

STANDARDS:

GME 60269



Tool 9A: Linear Abrader

As Tool 9 but with 16mm (0.63") diameter felt wool disc.

Total weight: 820g (28.9oz)

Part Number: **KT001720P075-1**



Tool 9B: Linear Abrader

Felt holder for 16mm (0.63") diameter felt wool disc working under a mass of 900g (31.7oz)

Total weight: 900g (31.74oz)

Part Number: **KT001720P075-2**

STANDARDS:

EN 13523-11, ECCA T11



Tool 10: Curved Sample Tool

Height adjustable with an elbow joint for curved samples, this tool is ideal for testing abrasion resistance of both coatings and inks. Supplied with felt disc, rod for masses, 1x50g (1.75oz), 1x100g (3.5oz), 2x200g (7oz) and 2x500g (17.5oz) mass

Part Number: **KT001720N003**

STANDARDS:

EN 60730-1-A

Accessories

Part Number	Description
KT001720P004	Wild Boar Brush for Tool 1
KT001720P009	Nylon Brush for Tool 2
KT001720P006	Sponge (5) for Tools 3 & 4
KT001720P141	Sponge/Abrasive (5) for Tool 5
KT001720P037	Abrasive Pads (10) for Tool 6
KT001720P064	Abrasive Pads (100) for Tool 6
KT001720P051	Abrasive G 120 Sheets (4) for Tools 1 & 2
KT001720P008	25m Abrasive Roll for Tool 7
KT001720P062	Felt Disks (2) for Tool 10
KT001720N009	Non-Abrasive Scrub Medium - SC1
KT001720N002	Abrasive Scrub Medium - SC2
KT001720P016	50g Mass (To fit tools 1 - 8, 10)
KT001720P017	100g Mass (To fit tools 1 - 8, 10)
KT001720P018	200g Mass (To fit tools 1 - 8, 10)
KT001720P031	227g Mass (To fit tools 1 - 8, 10)
KT001720P019	500g Mass (To fit tools 1 - 8, 10)
KT001720P214	Glass Plate, 478 x 165mm
KT001720P012	ASTM Test Foil 250µm (10mils)
KT001720P013	10m Replacement Channel Gasket
K0004695M068	Scrub Test Panels - see page 7

Scrub Test Panels


Elcometer 4695

In a typical scrub test, the coating is applied to the Leneta Scrub Test Panel at a specified film thickness, allowed to dry and then subjected to scrubbing with a straight-line scrub tester.

When used in accordance with ASTM D2486, Method A, a 10mil shim is inserted under the panel to accelerate failure and thereby reduce testing time. The scrub resistance is the number of scrub cycles required to remove the coating to a specified end point.

Alternatively, the loss in weight is determined after a specified number of scrub resistance cycles, with calculation of equivalent loss in film thickness.

These Scrub Test Panels are ideal for use with the Elcometer 1720 Washability & Abrasion Testers, see page 2.



Form P121-10N



Fig 1. Typical failure using shim per ASTM D2486 Method A



Fig 2. Typical failure without


STANDARDS:
ISO 11998

Technical Specification

Part Number		Description	Chart Dimensions		Quantity per Box	Boxes per Case
Box	Case		mm	inches		
K0004695M068	K0004695M268	Black Scrub Test Panel P121-10N	165 x 432	6½ x 17	100	5
K0004695M069	K0004695M269	White Scrub Test Panel P122-10N	165 x 432	6½ x 17	100	5

Accessories

KT001720P012	ASTM Test Foil 250µm (10mils)
--------------	-------------------------------

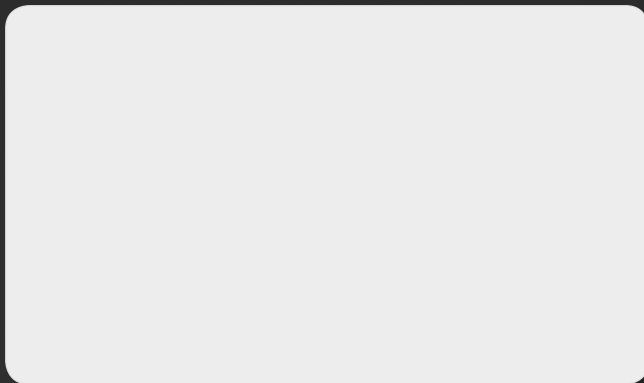

elcometer®
www.elcometer.com

ENGLAND

Elcometer Limited
Manchester M43 6BU
Tel: +44 (0)161 371 6000
Fax: +44 (0)161 371 6010
sales@elcometer.com
www.elcometer.com

BELGIUM

Elcometer SA
Tel: +32 (0)4 379 96 10
Fax: +32 (0)4 374 06 03
be_info@elcometer.com
www.elcometer.be

FRANCE

Elcometer Sarl
Tel: +33 (0)2 38 86 33 44
Fax: +33 (0)2 38 91 37 66
fr_info@elcometer.com
www.elcometer.fr

GERMANY

Elcometer Instruments GmbH
Tel: +49(0)7361 52806 0
Fax: +49(0)7361 52806 77
de_info@elcometer.com
www.elcometer.de

THE NETHERLANDS

Elcometer NL
Tel: +31 (0)30 259 1818
Fax: +31 (0)30 210 6666
nl_info@elcometer.com
www.elcometer.nl

JAPAN

Elcometer KK
Tel: +81-(0)3-6869-0770
Fax: +81-(0)3-6433-1220
jp_info@elcometer.com
www.elcometer.jp

REPUBLIC OF SINGAPORE

Elcometer (Asia) Pte Ltd
Tel: +65 6462 2822
Fax: +65 6462 2860
asia@elcometer.com
www.elcometer.com.sg

UNITED ARAB EMIRATES

EL Inspection & Blasting
Equipment LLC
Tel: +971 4 295 0191
Fax: +971 4 295 0192
uae_sales@elcometer.com
www.elcometer.ae

USA

MICHIGAN

Elcometer Inc
Tel: +1 248 650 0500
Toll Free: 800 521 0635
Fax: +1 248 650 0501
inc@elcometer.com
www.elcometer.com

TEXAS

Elcometer of Houston
Tel: +1 713 450 0631
Toll Free: 800 521 0635
Fax: +1 713 450 0632
inc@elcometer.com
www.elcometer.com